





Horus Vision, P.O. Box 616, Lewiston ID 83501 □ 866-568-2926 □ www.HorusVision.com
Copyright 2017 Horus Vision. All rights reserved. Written consent of Horus Vision required to copy or use any of the material in this document.


LOW MAGNIFICATION VIEW

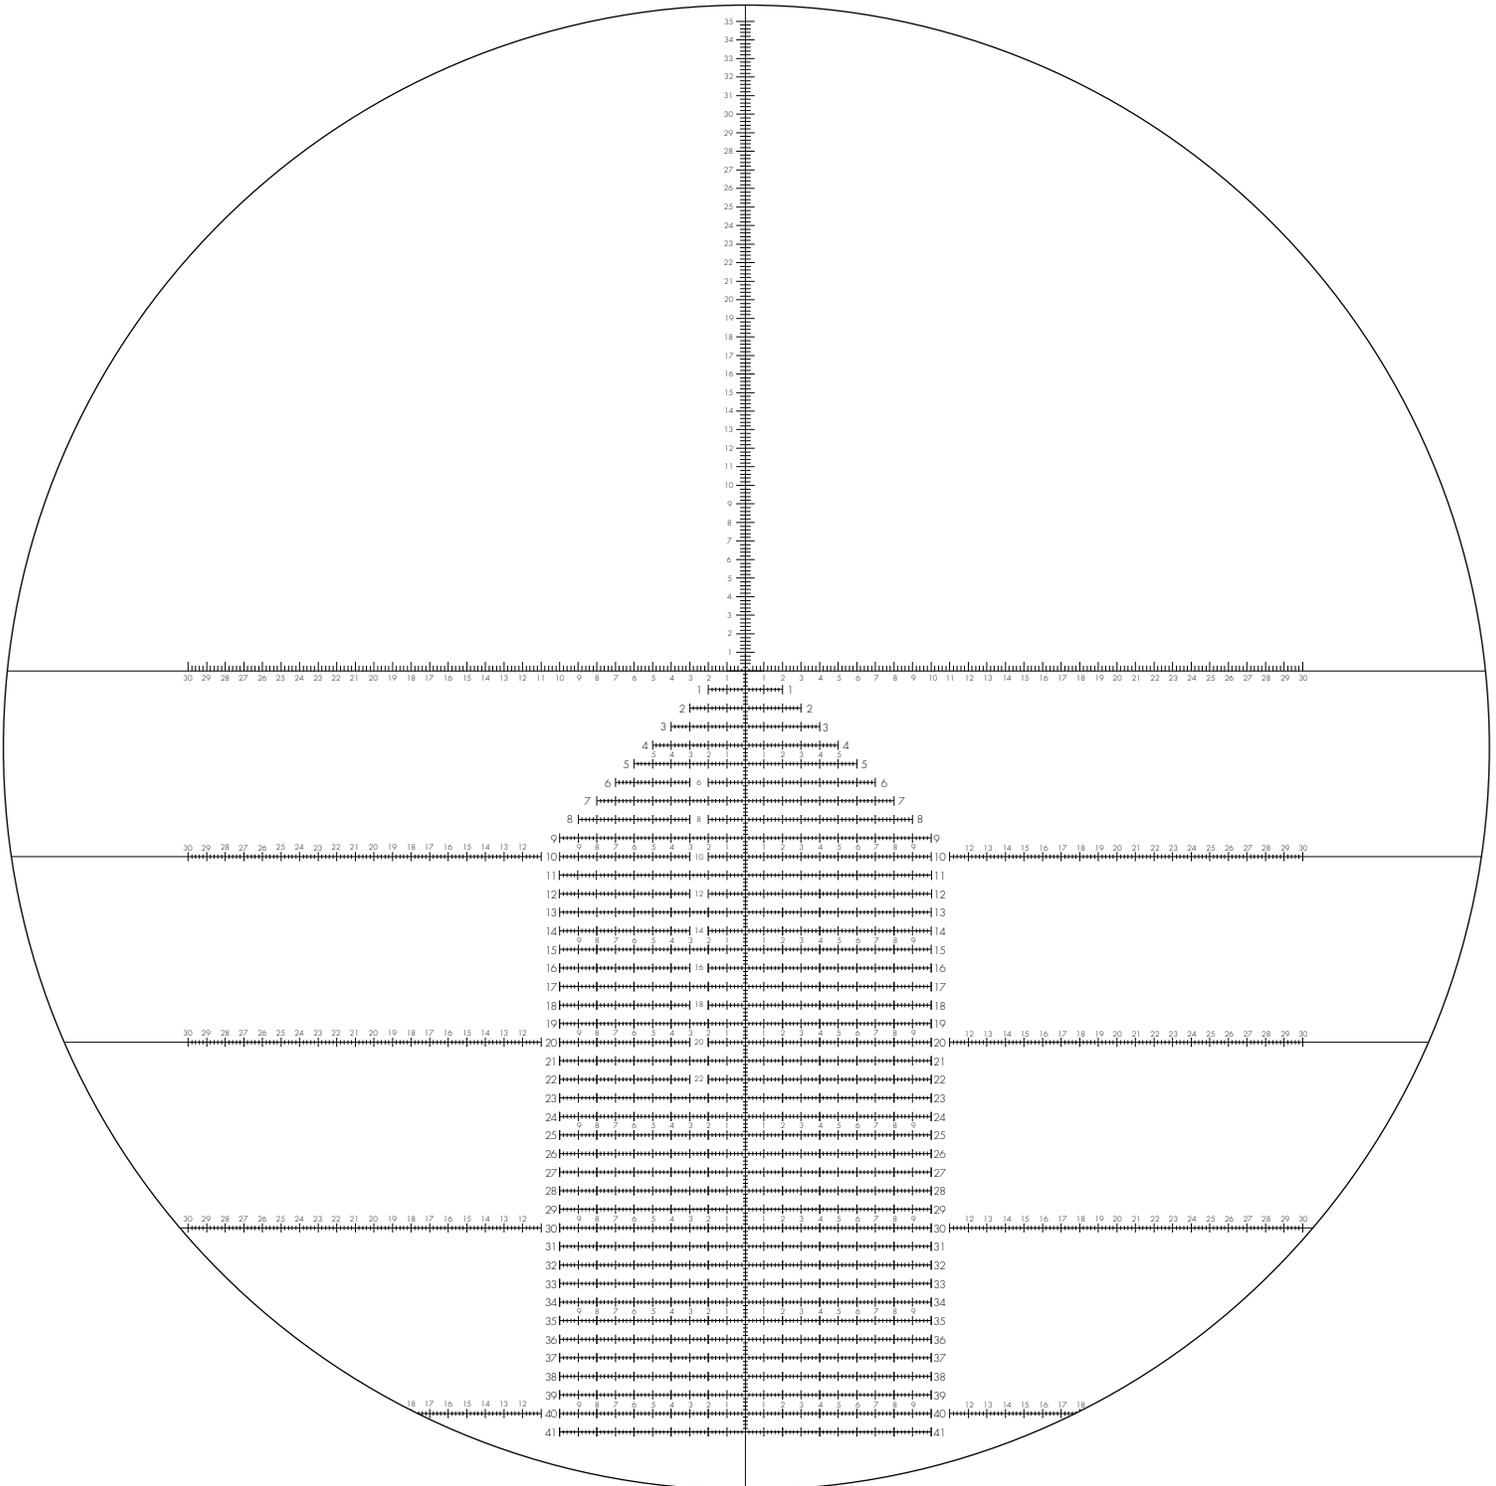

HIGH MAGNIFICATION VIEW

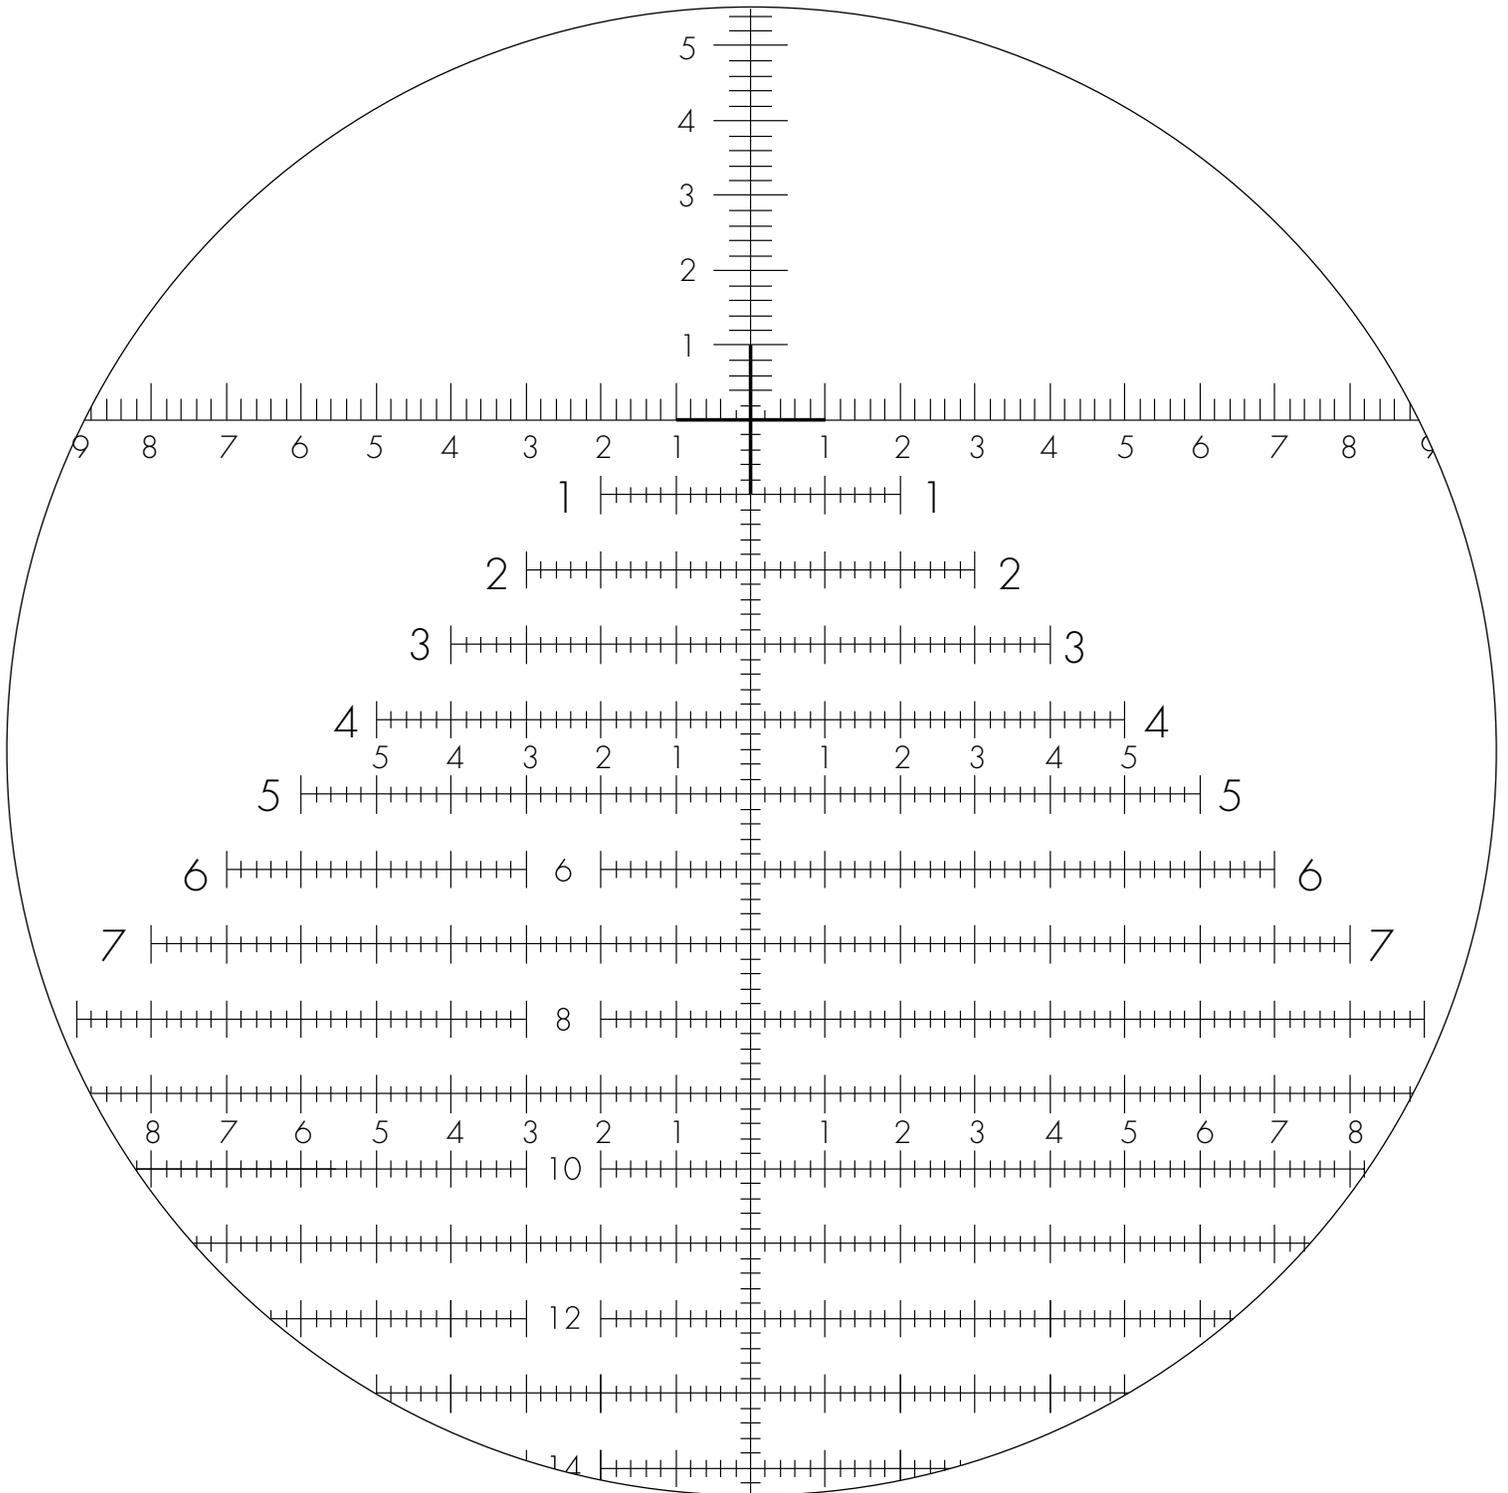


SPECIFICATIONS

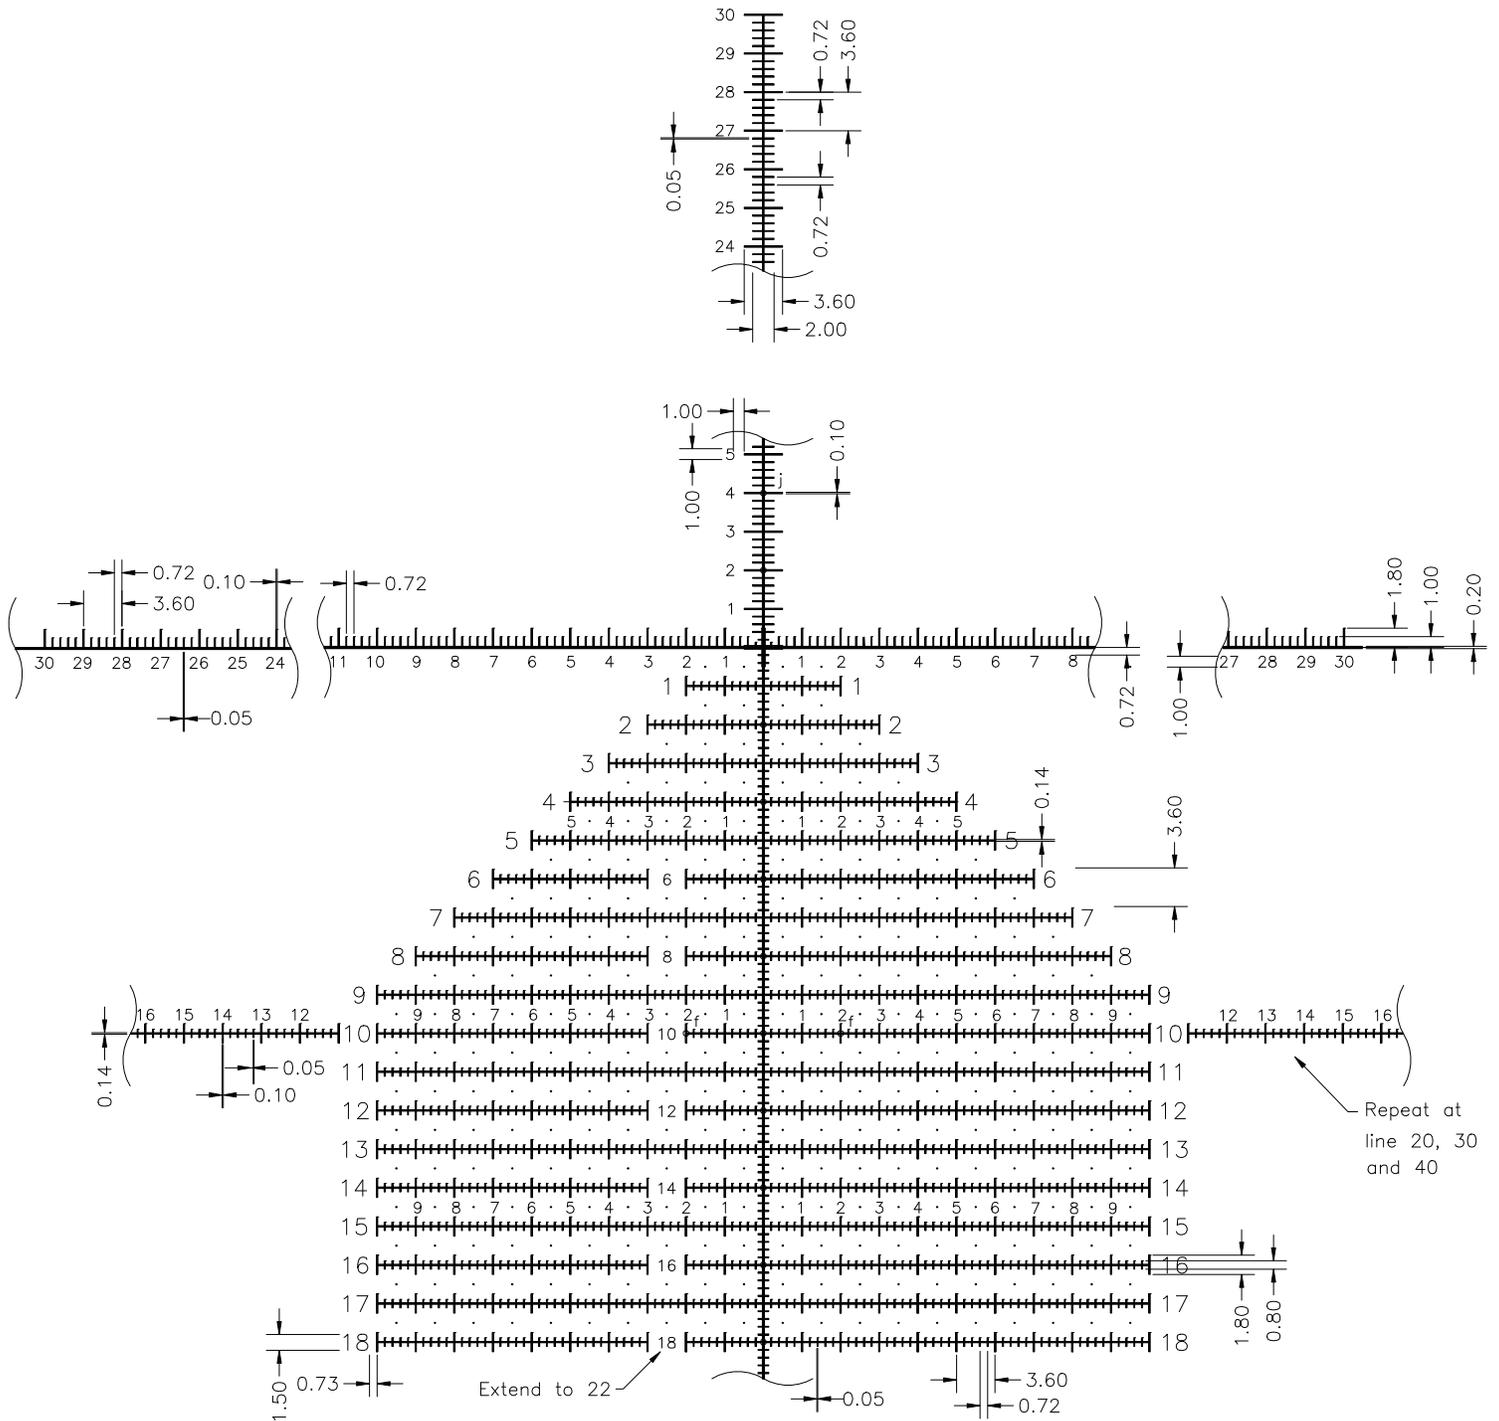

Dimensions are in inches a 100 yards.

ILLUMINATION PATTERN

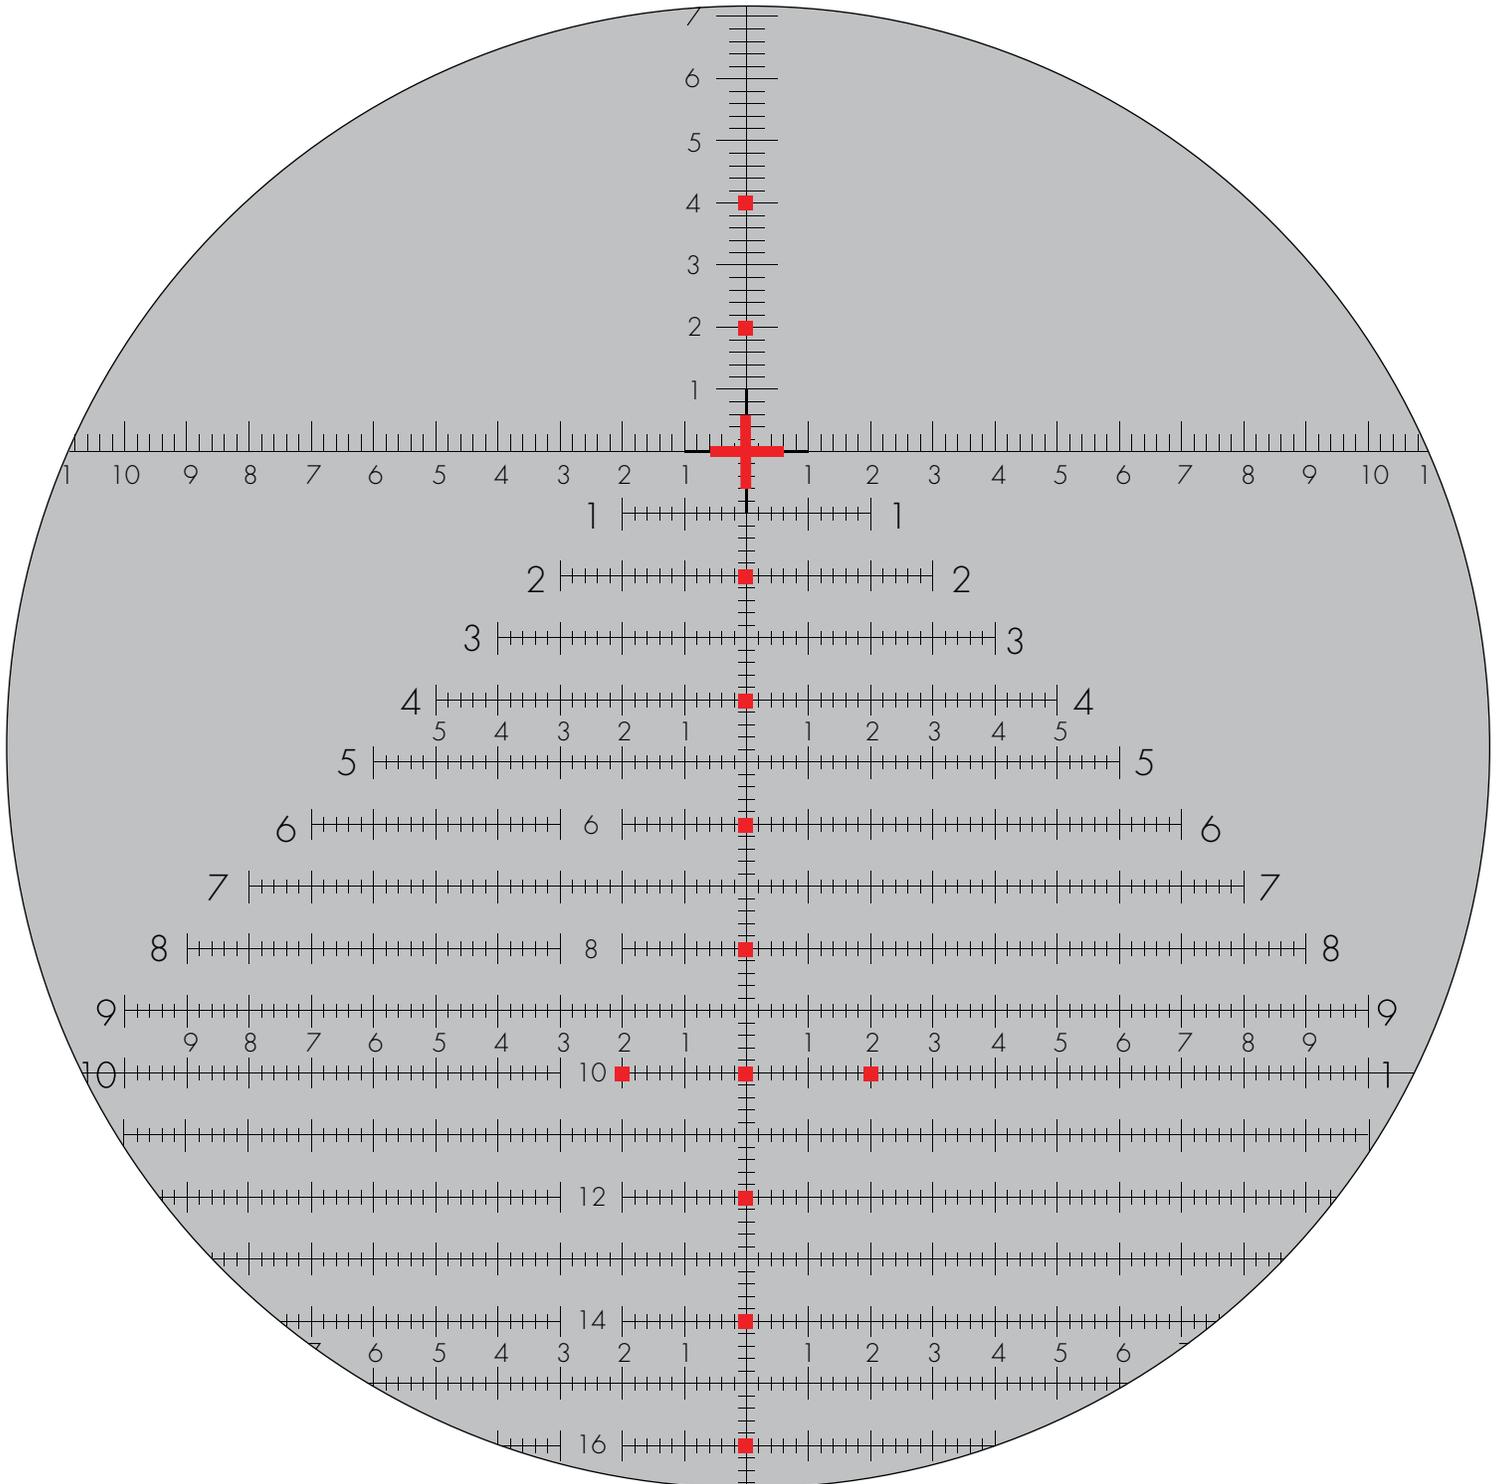

KEY FEATURES

- Ultra long range reticle recommended for extreme-range shooters.
- Central targeting grid elevated 4 mils in the field of view to allow for increased elevation adjustments on high power.
- A sloped base is required when using the H37 reticle to compensate for the elevated reticle. A 20 MOA base +/- is recommended.
- The H37 features a thin lined reticle.
- The Horus™ Grid lets you visually place the target on the appropriate horizontal and vertical grid lines to correct for elevation and windage visually without turning knobs or counting clicks.
- Secondary horizontal lines allow precise elevation holds. The standard spacing between the secondary horizontal lines is exactly 1 mil.
- To compensate for wind, drift, speed of target, etc.: each secondary horizontal stadia line is calibrated with “large hash marks” spaced exactly 1 mil apart; between each of the large hash marks, there are smaller evenly spaced hash marks that are exactly 0.2 mils apart.
- The Horus reticle is the only reticle that facilitates the rifleman to make an accurate Second Shot Correction™ should he fail to dispatch the target with his first round. For details, see our Tactical Manual.
- The H37 reticle features an illuminated reticle for twilight and lowlight conditions.

KEY FACTS

- Range: from 100 to 2000 yards and beyond.
- Central targeting grid calibrated in USMC mils (6283 mils/circle) (1 mil = 3.60 inches at 100 yards) (10cm at 100 meters).
- Precise calibration of measurements to within less than 0.5%.